


Keep the layout on paper until the leak and damaged edge are resolved

96 x 120 in clear interior. Same scale in each panel; no surveyed condition or capacity is implied.

01 / EXISTING

Front door: 36 in

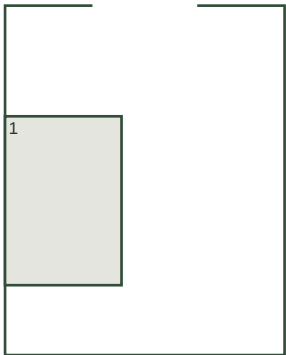


96 x 120 in clear

1. Storage

02 / CONDITION TO ADDRESS

Front door: 36 in




96 x 120 in clear

Leak / suspect rear edge

INVESTIGATE / INSTALLATION HELD

03 / PROPOSED ARRANGEMENT

Front door: 36 in

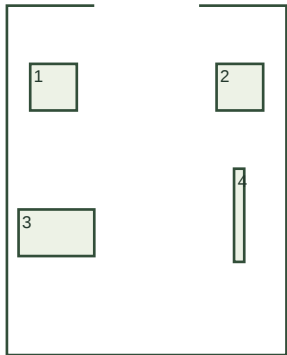

96 x 120 in clear

- 1. Proposed feed
- 2. Proposed water
- 3. Proposed nests
- 4. Proposed roost

PAPER ONLY / AFTER REINSPECTION

CONDITION-SPECIFIC DETAIL

The rear strip y=96..120 is flagged for investigation. Establish the leak source, extent of damage and temporary access restrictions with the relevant professional. Remeasure clear dimensions after repair; the proposed interior remains provisional until then.

Example positions are not structural opening, drainage, attachment or animal-housing approval. See the PDF for work order.

Example overview. Following pages contain its conditional work and material scope.

EXAMPLE: Keep the layout on paper until the leak and damaged edge are resolved


Current unsaved inputs

Measured preparation and quote scope. Unknowns and work holds are retained. This worksheet does not design structural alterations. All dimensions are inches.

1. Existing condition and measured room

Repairs or services unresolved

Example condition: active roof entry and a suspect rear floor edge. The illustrated damage zone is a marked observation, not a diagnosis or a repair design. Only safely accessible measurements are recorded.



96 x 120 in clear

Door: front; offset 30 in; usable opening 36 in. Empty measured room; no furniture, height or swing is inferred.

Loaded container width: 24 in. 12 in width difference only. Rehearse handles, door swing, approach and turning with the actual load; this is not a route pass.

Retain: Keep the measurements and observations that can be collected from an accessible position. Do not treat suspect structural material as confirmed reusable stock.

Adapt: Sequence the necessary assessment and repair before the interior conversion. Delay cutting openings, concealing damage or installing heavy fittings in the affected area.

Resolve: Which element is affected, the cause, the repair scope and who can confirm it. Electrical work and structural alterations need the appropriate qualified person.

Opening: retain. Existing opening retained in this declared example. Actual closure and backing need inspection.

Floor: retain. No covering quantity calculated. Bedding and any repairs remain separate.

2. Work in dependency order

01. Measure the shell and the real route

Measurements recorded / rehearse on site

Record safely accessible dimensions and locate leak/damage observations. Do not enter or load an area whose access condition is unresolved.

Continue when: The sketch distinguishes measured facts from assumed positions; each unknown has a named measurement or decision.

02. Resolve shell, moisture and service work

Resolve before affected work

Obtain a cause, affected extent and repair scope from the appropriate professional. Keep repair, temporary access and services decisions ahead of conversion purchases.

Continue when: The relevant repair and alteration scope is recorded; affected work does not proceed on a layout assumption.

03. Rehearse the interior before fastening

Paper layout only while repairs remain

Keep a provisional furniture plan on paper. After repairs, remeasure the clear room, door and changed surfaces before transferring dimensions to the layout editor.

Continue when: The door works, supplies remain accessible and cleaning can reach each intended floor area with the actual tools.

04. Complete reviewed openings and enclosure work

Hold opening and enclosure work

Hold opening cuts and enclosure alterations in the affected shell. Use a wall-specific reviewed detail only after the repaired construction is known.

Continue when: Openings, attachments and weather transitions match their recorded decisions; no generic sketch is being used as a structural detail.

05. Fit the interior and organize supplies

Hold installation / plan removable fittings

Hold mounted fittings and concealing overlays until repair acceptance and actual backing are recorded. Quotes and saved layouts may continue without implying permission to install.

Continue when: Fittings are secure and removable as intended; a refill or clean-out does not require dismantling a structural element.

06. Run the complete care sequence

Test after earlier work; no occupation approval

After repair and remeasurement, rehearse equipment removal and inspect for recurrence. Keep an observation date and unresolved follow-up; do not mark occupation ready from this worksheet.

Continue when: The setup supports the actual care routine, with the date and unresolved follow-up written beside the sketch.

3. Owned, needed and awaiting a quote

Your statuses do not override repair or opening holds. No cost total is added to another project budget.

C01. Shell, floor and moisture repairs

Status: Unresolved. Quantity basis: Separate measured repair scope

Obtain the leak/damage assessment and repair quote first; suspect stock is not retained inventory.

Your quantity / product / quote: Obtain the leak/damage assessment and repair quote first; suspect stock is not retained inventory.

C02. Opening framing and backing

Status: Unresolved. Quantity basis: Reviewed opening / attachment detail

Opening and attachment quantities on hold until the repaired wall/floor construction is known.

Your quantity / product / quote: Opening and attachment quantities on hold until the repaired wall/floor construction is known.

C03. Protected air openings and closures

Status: Unresolved. Quantity basis: Measured opening + selected assembly

Record proposed enclosure scope, but separate repair weather-tightness from later protected-air changes.

Your quantity / product / quote: Record proposed enclosure scope, but separate repair weather-tightness from later protected-air changes.

C04. Removable nests and roosts

Status: Unresolved. Quantity basis: Selected units / member lengths

Provisional fitting selection only; do not commit mounted-unit quantities against unknown backing.

Your quantity / product / quote: Provisional fitting selection only; do not commit mounted-unit quantities against unknown backing.

C05. Floor protection and bedding

Status: Unresolved. Quantity basis: Measured usable floor / product pack

No covering quantity calculated. Bedding and any repairs remain separate. Covering and bedding installation held. Do not conceal the area that requires investigation.

Your quantity / product / quote: Covering and bedding installation held. Do not conceal the area that requires investigation.

C06. Feed and water equipment

Status: Unresolved. Quantity basis: Selected equipment footprint

Optional portable supplies can be quoted without committing to the provisional positions.

Your quantity / product / quote: Optional portable supplies can be quoted without committing to the provisional positions.

C07. Outdoor enclosure and bird connection

Status: Unresolved. Quantity basis: Separate site sketch and quote

Keep outdoor enclosure and bird-connection purchases on hold where shell repair affects attachment or access. Recheck the proposed boundary, gate and connection after the repaired shell is remeasured.

Your quantity / product / quote: Keep outdoor enclosure and bird-connection purchases on hold where shell repair affects attachment or access. Recheck the proposed boundary, gate and connection after the repaired shell is remeasured.

C08. Delivery, disposal, tools and services

Status: Unresolved. Quantity basis: Itemized project costs

Agree safe waste removal and repair access; do not assume the normal care route is usable. Separate assessment, repair and service quotes; compare the whole cost with a new-coop option.

Your quantity / product / quote: Agree safe waste removal and repair access; do not assume the normal care route is usable. Separate assessment, repair and service quotes; compare the whole cost with a new-coop option.

4. Project notes and revision context

DECLARED EDITORIAL EXAMPLE v2.0.0. The rear strip y=96..120 is flagged for investigation. Establish the leak source, extent of damage and temporary access restrictions with the relevant professional. Remeasure clear dimensions after repair; the proposed interior remains provisional until then.

PAPER STUDY ONLY. Nothing is shown as installed or approved; update this layout after repair and remeasurement.

The measured layout is transferred when you download its JSON. Later worksheet and editor changes remain separate; compare clear dimensions, doorway and date before ordering. A backup of this worksheet and its material CSV are also attached to this PDF.